



**Eur päisches
Patentamt**

**Eur pean
Patent Office**

**Office eur péen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00203437.9

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

12/06/01

Blatt 2 der Beschreibung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 00203437.9
Demande n°:

Anmeldetag:
Date of filing: 03/10/00
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Optical scanning device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/UK
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

PHNL000554EPP

2

03.10.2000

in the objective lens when an optical record carrier is read in a direction which is non-axial with respect to said objective lens, whereby an improved field of view is provided for said objective lens.

The root mean square (rms) comatic wavefront error caused by the objective lens at a certain field angle with respect to the axial direction is preferably compensated for by at least 50% by said non-periodic phase structure. More preferably, the compensation is at least 70%. The field angle for an optical recording read and/or write device is preferably 1°. This is also the maximum required field angle for multi-track scanning of an optical record carrier. The resulting apparatus provides a significantly improved performance with a relatively large field tolerance. In the field of optical recording the residual amount of wavefront error at the maximum required field angle is after compensation preferably less than 40mλ and more preferably less than 20mλ.

The non-periodic phase structure may include a plurality of annular zones, each of said zones comprising a step of a substantially constant height with respect to a rotationally symmetrical aspheric shape generally followed by said objective lens. Steps in the non-periodic phase structure preferably generate a relative phase difference of approximately a multiple of 2π for radiation of said selected wavelength when an optical record carrier is read in said axial direction. Thereby, the effect on the performance of the lens when operating axially is not significant.

The heights of said zones are selected substantially optimally in relation to comatic aberration to be compensated for. Thereby, a relatively large degree of compensation can be provided.

The number of zones in the non-periodic structure is preferably limited, for manufacturing efficiency. The number of said zones is preferably less than 10, and may be the region of only 5.

In accordance with a further aspect of the present invention there is provided an optical including an optical element having optical power and an axial direction and a radial direction, and a phase structure which is non-periodic with respect to the radial direction, the non-periodic phase structure being arranged to compensate for comatic aberrations generated by the optical element when an optical beam traverses the optical

direction which is non-axial with respect to said element, whereby an improved field of view is provided. The optical element may be a lens

It is noted that it has previously been proposed to use a non-periodic phase structure to compensate for wavefront aberrations. Reference is made to "Dual-wavelength optical head with a wavelength-selective filter for 0.6- and 1.2-mm-thick-substrate optical disks", Katayama et al., Applied Optics, Vol. 38, No. 17, 10 June 1999, and EP-A-865037.

5 However, in these proposed arrangements the non-periodic phase structures are used in order to compensate only for spherical aberrations due to differences in information layer depths in optical disks, when using two different wavelengths of radiation.

Notably, in the case of the present invention, comatic aberration compensation may be achieved without altering the wavelength of the radiation applied.

10

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, wherein:

Figure 1 is a schematic illustration of components of a scanning device for
15 optical record carriers according to one embodiment of the present invention;

Figure 2 is a schematic front view of the objective lens shown in Figure 1, showing a non-periodic phase structure;

Figure 3 is a schematic cross section of the objective lens shown in Figure 2;

Figure 4 is a schematic illustration of a spherical coordinate system used in
20 accompanying explanations; and

Figure 5 is a graph showing compensated, and uncompensated, wavefront aberrations.

25 Figure 1 is a schematic illustration of components common to a device in accordance with the invention for scanning an optical record carrier 1. The record carrier 1 is in this embodiment an optical disc as will be described, by way of example, below.

The optical disc 1 comprises a transparent layer 2, on one side of which at least one information layer 3 is arranged. The side of the information layer facing away from
30 the transparent layer is protected from environmental influences by a protection layer 4. The side of the transparent layer facing the device is the disc entrance face 5. The transparent layer 2 acts as a substrate for the optical disc by providing mechanical support for the information layer or layers. Alternatively, the transparent layer 2 may have the sole function of protecting the information layer 3, while the mechanical support is provided by a layer on

the other side of the information layer, for instance by the protection layer 4 or by a further information layer and transparent layer connected to the uppermost information layer.

Information may be stored in the information layer 3, or information layers, of the optical disc in the form of optically detectable marks arranged in substantially parallel, concentric or spiral tracks, not indicated in Figure 1. The marks may be in any optically readable form, e.g. in the form of pits, or areas with a reflection coefficient or a direct of magnetisation different from their surroundings, or a combination of these forms.

The scanning device includes a radiation source 6, comprising a semiconductor laser or two separate semiconductor lasers, emitting radiation of a selected wavelength in a diverging radiation beam 7 towards a lens system. The lens system includes a collimator lens 9 and an objective lens 10 arranged along optical axis 13. The collimator lens 3 transforms the diverging beam 7 emitted from the radiation source 6 into a substantially collimated beam 15. The objective lens 10 comprises a non-periodic phase structure, which is indicated in the drawing by the pattern 11 and will be described in more detail below. The objective lens 10 transforms the incident collimated radiation beam 15 into a converging beam 14, having a selected NA, which comes to a spot 18 on the information layer 3. A detection system 16, a second collimator lens 19 and a beam splitter 8 are provided in order to detect data signals, and focus error signals which are used to adjust mechanically the axial position of the objective lens 10.

The optical scanning device may be of the type capable to performing simultaneous multi-track scanning, which has the effect of improving data read-out and/or write speed. Such devices are known, and described for example in the US patent no. 4 449 212, of which the description of the multi-tracking arrangement is incorporated herein by reference.

By use of the scanning device, discs of DVD format may be scanned with laser radiation of a first wavelength λ_1 between say 620 and 700nm, preferably $\lambda_1=660$ nm. A numerical aperture of about 0.6 is used for reading DVD and an NA above 0.6, preferably 0.65, is applied for writing DVD.

Figure 2 is a schematic front view of the objective lens 10 illustrating the non-periodic phase structure. The non-periodic phase structure 11 is arranged on the side of the objective lens 10 facing the radiation source. However, it may alternatively be arranged on the other surface of lens 10. It can be seen that a plurality of phase structure elements are provided in the form of annular regions. Each annular region defines a so-called zone of the phase structure. In order to enable acceptable operation of the lens over a

relatively wide field of view, the non-periodic phase structure generates comatic aberrations at non-axial angles of incidence for the lens, to compensation for the comatic aberrations generated in the lens itself.

The general principle behind the comatic compensatory effect provided in the present invention will next be explained in some detail with reference to Figures 3 and 4.

Figure 3 is a cross-section along a plane including an axis, running in the radial direction of the lens 10, indicated as the X axis, and the optical axis of the lens 10, indicated as the Z axis. Figure 3 illustrates an exemplary embodiment of the objective lens 10 having a single, exemplary, raised step 20, of height h , forming an annular zone of a non-periodic phase structure 11 on the side of the lens which faces the radiation source. The height h of the structure in the Figure is exaggerated; in general, it is small compared to the physical dimensions of the lens. The non-periodic phase structure 11 is superimposed on a basic aspherical lens shape 22 which the lens surface generally follows. The basic lens shape 22 has a best fit radius R . The step 20, as is the case with all steps of a non-periodic phase structure in accordance with this embodiment, has a surface which runs substantially parallel to the basic aspherical lens shape, so as to generally provide the same refractive effect as that provided by the basic lens shape, other than the additional comatic aberration correction effect. An incoming beam of radiation is indicated by means of ray 24 falling on step 22 corresponding to a position at a radius r of the lens surface. A variation in the angle of incidence of the incoming beam of radiation is indicated as an angle of rotation ψ about the Y axis.

Figure 4 illustrates the three dimensional coordinate system used to describe a point (x,y,z) on a step 20 of the structure. In addition to the parameters described above, the azimuthal angle ϕ about the Z axis, taken with respect to the X axis, is also illustrated.

The stepped profile gives rise to an additional optical path difference OPD equal to

$$OPD(\theta) = h \left[-\cos \theta + n \sqrt{1 - \frac{\sin^2 \theta}{n^2}} \right] \quad (1)$$

Where h is the height of the structure in radial direction, n the refractive index and θ the angle between the normal on the surface of the step and the Z axis. When we choose the height of the step such that it introduces a phase equal to a multiple of 2π , the structure has no optical effect on the incoming beam.

Consider now the case where the lens rotates an angle ψ around the Y axis (see figure 4), where the origin of the co-ordinate system coincides with the centre of curvature of the best fit radius of the aspherical surface of the lens. Let (x,y,z) be a point on the stepped structure. This point can be expressed in spherical co-ordinates as

$$(x,y,z)=(R \sin \zeta \cos \varphi, R \sin \zeta \sin \varphi, R \cos \zeta), \quad (2)$$

where ζ and θ are related according to

$$\theta = \pi - \zeta. \quad (3)$$

After rotation this point (x,y,z) is positioned at (x',y',z') given by

$$\begin{aligned} x' &= R \sin \zeta \cos \varphi \cos \psi - R \cos \zeta \sin \psi \\ y' &= R \sin \zeta \sin \varphi \\ z' &= R \sin \zeta \cos \varphi \sin \psi + R \cos \zeta \cos \psi \end{aligned} \quad (4)$$

10 When we write

$$(x',y',z')=(R \sin \zeta' \cos \varphi', R \sin \zeta' \sin \varphi', R \cos \zeta'). \quad (5)$$

we find in lowest order in ψ that

$$\begin{aligned} z' &= R \sin \zeta \cos \varphi \sin \psi + R \cos \zeta \cos \psi \\ &\approx \psi R \sin \zeta \cos \varphi + R \cos \zeta \\ &\approx R \cos(\zeta - \psi \cos \varphi) \end{aligned} \quad (6)$$

Hence, we find that

$$15 \quad \zeta' = \zeta - \psi \cos \varphi \quad (7)$$

and thus

$$\theta' = \theta + \psi \cos \varphi \quad (8)$$

Substituting this in (1) we find that this small rotation gives rise to a change in OPD in lowest order in ψ equal to

3	0.84	0.9	0.870	0	0.633	0	0
4	0.9	0.96	0.930	-9	0.677	-0.068	-8.814
5	0.96	1.0	0.980	-21	0.713	-0.167	-20.062

Table 1

5 In the above embodiment the step height h_j has been given as a constant value. This is useful as a first approximation, with the step height being calculated appropriately for the radial centre of the zone. However, a slightly better result can be achieved by taking into account the variation in angle θ across the width of a zone, such that the step height varies slightly across the zone.

10 It is to be appreciated that numerous variations and modifications may be employed in relation to the embodiments described above, without departing from the scope of the invention which is defined in the appended claims. The objective lens is shown as a convex-convex lens; however other lens element types such as plano-convex or convex-concave lenses may also be used. Whilst the objective lens as in the described embodiment

15 is a single lens, it may be a compound lens containing two or more lens elements, either, or both, of which may include at least a part of the non-periodic phase structure of the invention. The non-periodic phase structure may be divided between different parts of the optical system. The objective lens may for example comprise a refractive objective lens element and a diffractive lens element. The non-periodic phase structure may also be provided on an

20 optical element separate from the objective lens, for example on a separate generally aspherical thin plate. The application of the non-periodic phase structure according to the invention is not limited to the field of optical recording. The phase structure may be used in any field of optics, e.g. photography and the field of telescopes. Although the embodiments of the non-periodic phase structure shown hereinbefore are arranged on a curved surface, the

25 phase structure may be arranged on a surface having any shape, e.g. a flat surface. It should be noted, that for a proper operation of the phase structure the wavefront of the incident beam at the surface on which the non-periodic phase structure is arranged must a shape different from that of the surface. More specifically, if the wavefront is substantially spherical and the surface is also substantially spherical, the radii of curvature of the wavefront and the surface

30 have to be different, preferably different by more than 20%. For example, when the phase

The best fit radius of the aspheric surface is $R=2.268\text{mm}$. Let r_{max} be the pupil radius, $r_{\text{max}}=1.65\text{mm}$. We define:

$$\rho_j = r_j / r_{\text{max}} \tag{16}$$

An annular zone present on the curved (aspheric) surface of the lens centred at r_j introduces a comatic wavefront contribution W_j equal to (using equation (13)):

$$W_j(\psi)/\lambda = \Phi_j / 2\pi = 0.0081 \, m_j \, \rho_j \cos(\varphi) \, \psi / 0.0175 \tag{17}$$

To compensate the comatic wavefront aberration introduced by the lens we provide a non-periodic structure divided into a selected number of zones, preferably less than say 10 and in this example 5. Table 1 lists the properties of the resulting non-periodic structure with the heights of the steps in the five different annular zones selected in order to have substantially no effect on the properties of the lens when radiation is incident along the optical axis, but providing a substantially optimum compensation for comatic aberrations generated in the lens. This substantially optimum compensation is achieved by substantially minimising the residual rms wavefront error within the constraint of the finite, relatively small, number of zones provided.

Figure 5 illustrates the wavefront aberration W/λ for $\varphi=0$ and $\psi=0.0175$ radians as a function of the normalized pupil coordinate ρ . Dashed line (a) represents the uncompensated wavefront aberration, whereas solid line (b) illustrates the compensated wavefront aberration.

As a result of the presence of the non-periodic phase structure the comatic wavefront aberration reduces from $\text{OPD}_{\text{rms}} = 0.0485\lambda$ to $\text{OPD}_{\text{rms}} = 0.0124\lambda$, hence a reduction of a factor of 4.

j	ρ_{begin}	ρ_{end}	ρ_j	m_j	$\sin\theta_j = \rho_j \, r_{\text{max}} / R$	$\Phi_j/2\pi$	$h_j \, [\mu\text{m}]$
1	0	0.45	0.225	0	0.164	0.000	0.0
2	0.45	0.84	0.645	10	0.469	0.052	10.841

tilted case these structures have no effect on the wavefront. In the following an explicit embodiment of the above principle will be given.

In this embodiment, the objective lens 10 focuses an incoming parallel beam with wavelength $\lambda = 660\text{nm}$ into a converging beam with $\text{NA}=0.6$, which forms through a disc cover layer of 0.6mm a spot on the information layer. The free working distance in this embodiment is 1.353mm . The cover layer thickness of the disk is 0.6mm made of polycarbonate with a refractive index $n=1.5796$. The lens has thickness on the optical axis of 1.817mm and entrance pupil diameter of 3.3mm . The body of the lens is made of LAFN28 Schott glass with refractive index $n=1.7682$. The convex surface of the lens body which is directed towards the collimator lens has radius 2.28mm . The aspherical shape is realised by means of a thin layer of acryl on top of the glass body. The lacquer has refractive index $n=1.5640$. The thickness of this layer on the optical axis is 17 micrometer . The rotational symmetric aspherical shape is given by the equation:

$$z(r) = B_{2i} r^{2i} \quad (14)$$

with z being the position of the surface in the direction of the optical axis in millimetres, r the distance to the optical axis in millimetres, and B_k the coefficient of the k^{th} power of r . The value of the coefficients B_2 to B_{10} are in this example 0.2420141 , -0.0045950331 , -0.00016786429 , $-4.2268162 \cdot 10^{-5}$, and $8.5889657 \cdot 10^{-6}$, respectively.

As a function of the field angle ψ the lens, when uncorrected, gives rise to a comatic wavefront aberration W which is given by:

$$W(\rho, \psi) = [A_{31}(3\rho^3 - 2\rho) \cos(\phi) + A_{51}(10\rho^5 - 12\rho^3 + 3\rho) \cos(\phi)] \psi / 0.0175 \quad (15)$$

with ρ being the normalized pupil coordinate and the Zernike coefficients being given by $A_{31}=0.1130\lambda$ and $A_{51}=0.0950\lambda$ (expressed in wavelengths). The angle ψ is expressed in radians. This results in a root mean square of the optical path difference of the wavefront aberration, also referred to as the root mean square of the wavefront error, $\text{OPD}_{\text{rms}} = 0.0485\lambda$.



$$\Delta OPD(\psi) = OPD(\theta + \psi \cos \varphi) - OPD(\theta)$$

$$\begin{aligned} &= h \psi \cos \varphi \sin \theta \left[1 - \frac{\cos \theta}{n \sqrt{1 - \frac{\sin^2 \theta}{n^2}}} \right] \\ &= h \psi \cos \varphi \sin \theta \left[\frac{-\cos \theta + n \sqrt{1 - \frac{\sin^2 \theta}{n^2}}}{n \sqrt{1 - \frac{\sin^2 \theta}{n^2}}} \right] \quad (9) \end{aligned}$$

Let the height h be given by

$$h = m_j \frac{\lambda}{-\cos \theta + n \sqrt{1 - \frac{\sin^2 \theta}{n^2}}} \quad (10)$$

with m_j an integer number. This height introduces a phase $m_j 2\pi$ when $\psi=0$. When ψ is

5 nonzero this structure gives rise to a relative phase Φ_{rel} (hence phase modulo 2π) equal to

Furthermore, using $\sin \theta = r/R$ (see figure 4), we find finally

$$\begin{aligned} \Phi_{rel} &= \frac{2\pi}{\lambda} \Delta OPD(\psi) \approx 2\pi m_j \frac{\psi \sin \theta \cos \varphi}{n \sqrt{1 - \frac{\sin^2 \theta}{n^2}}} \approx 2\pi m_j \frac{\psi \sin \theta \cos \varphi}{n} \quad (11) \\ \Phi_{rel} &= 2\pi m_j \frac{\Delta OPD(\psi)}{nR} \end{aligned}$$

Notice that this phase is a function of $\cos \varphi$. Hence, it generates a comatic

10 aberration.

Divide the entrance pupil in a number of radial zones. The central radius of each zone is r_j . In each zone we introduce a step with a height such that it introduces a phase equal to $m_j 2\pi$ when $\psi=0$. Hence these steps have no influence on the properties of the lens.

When the lens tilts by an angle ψ , each zone j gives rise to a relative phase Φ_j equal to

$$\Phi_j = 2\pi m_j \frac{r_j \psi \cos \varphi}{nR} \quad (13)$$

15

By proper choice of the zones and the integer values m_j we can compensate to a good extend the coma arising from the tilted lens by these phase structures, while in the non

CLAIMS:

1. An optical scanning device for scanning optical record carriers with radiation of a selected wavelength, the device including an objective lens, having an axial direction and a radial direction, and a phase structure which is non-periodic with respect to the radial direction, the non-periodic phase structure being arranged to compensate for comatic aberrations generated in the objective lens when an optical record carrier is read in a direction which is non-axial with respect to said objective lens, whereby an improved field of view is provided for said objective lens.
2. An optical scanning device according to claim 1, wherein said non-periodic phase structure compensates at least 50% of the root mean square (rms) comatic wavefront error at a certain field angle with respect to the axial direction and caused by the objective.
3. An optical scanning device according to claim 2, wherein said non-periodic phase structure compensates at least 70% of the root mean square (rms) comatic wavefront error at a certain field angle with respect to the axial direction and caused by the objective.
4. An optical scanning device according to any of claims 1 to 3, wherein the rms wavefront error caused by the comatic aberration generated by the objective lens at a maximum required field angle with respect to the axial direction, as compensated by the non-periodic phase structure, is less than $40m\lambda$.
5. An optical scanning device according to claim 4, wherein the rms wavefront error caused by the comatic aberration generated by the objective lens at a maximum required field angle with respect to the axial direction, as compensated by the non-periodic phase structure, is less than $20m\lambda$.
6. An optical scanning device according to any preceding claim, wherein said non-periodic phase structure includes a plurality of annular zones, each of said zones

PHNL000554EPP

11

03.10.2000

structure is arranged on a flat surface, the incident beam must have a vergency unequal to zero.

Whilst in the above described embodiment a scanning device for scanning carriers of DVD format is described, it is to be appreciated that the scanning device can be alternatively or additionally used for any other types of optical record carriers to be scanned. It is also to be appreciated that radiation of other combinations of wavelengths than 660 nm, suitable for scanning optical record carriers, may be used.

comprising a step of a substantially constant height with respect to a rotationally symmetrical aspheric shape generally followed by said objective lens.

7. An optical scanning device according to claim 6, wherein steps in said non-
5 periodic phase structure generate a relative phase difference of approximately a multiple of 2π for radiation of said selected wavelength when an optical record carrier is read in said axial direction.

8. An optical scanning device according to claim 6 or 7, wherein the radial
10 widths of said zones selected in dependence on the comatic aberration to be compensated for.

9. An optical scanning device according to any of claims 6 to 8, wherein the heights of said zones are selected substantially optimally in relation to the comatic aberration to be compensated for.

10. An optical scanning device according to any of claims 6 to 9, wherein the number of said zones is less than 10.

11. An optical scanning device according to any preceding claim, wherein said
20 non-periodic phase structure is formed on the surface of said objective lens.

12. An optical including an optical element having optical power and an axial direction and a radial direction, and a phase structure which is non-periodic with respect to the radial direction, the non-periodic phase structure being arranged to compensate for
25 comatic aberrations generated by the optical element when an optical beam traverses the optical system in a direction which is non-axial with respect to said element, whereby an improved field of view is provided for said optical element.

PHNL000554EPP

14

03.10.2000

ABSTRACT:

An optical scanning device for scanning optical record carriers with radiation of a selected wavelength, the device including an objective lens, having an axial direction and a radial direction, and a phase structure which is non-periodic with respect to the radial direction, the non-periodic phase structure being arranged to compensate for comatic
5 aberrations generated in the objective lens when an optical record carrier is read in a direction which is non-axial with respect to said objective lens, whereby an improved field of view is provided for said objective lens.

Fig. 2

1/3

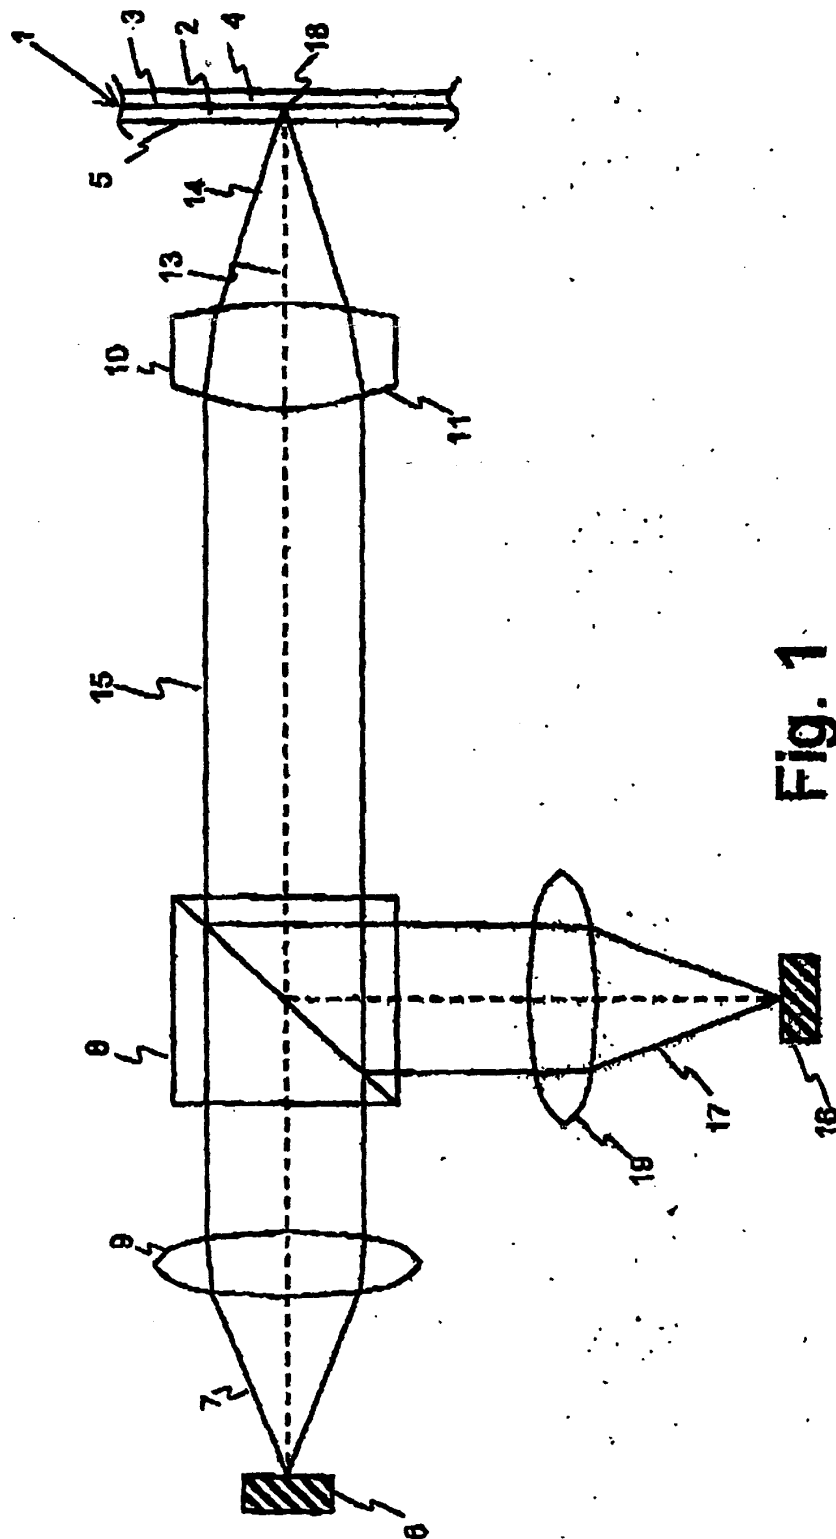


Fig. 1

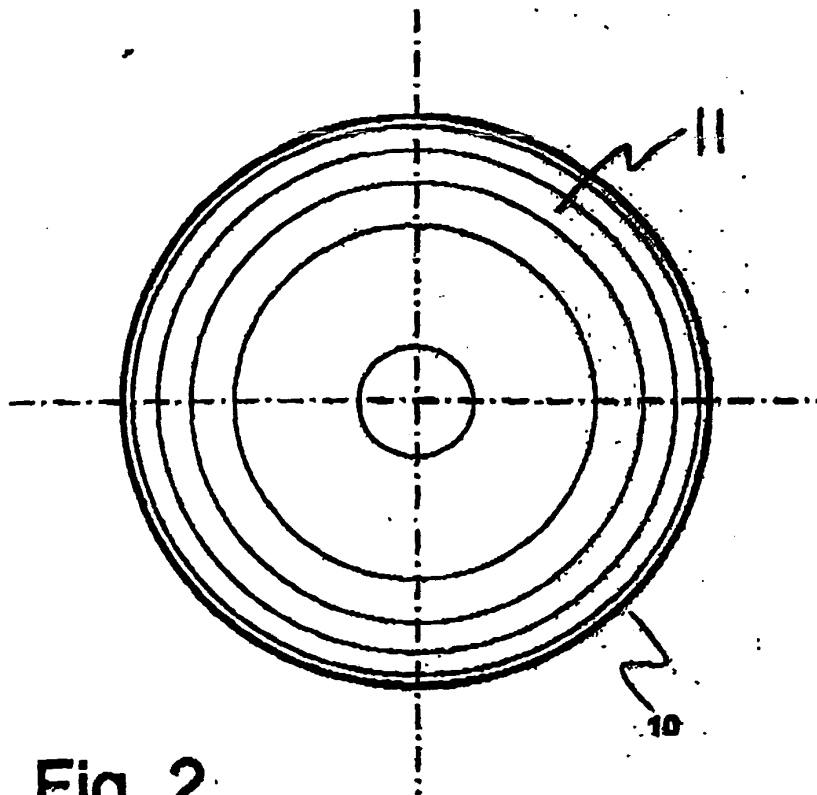
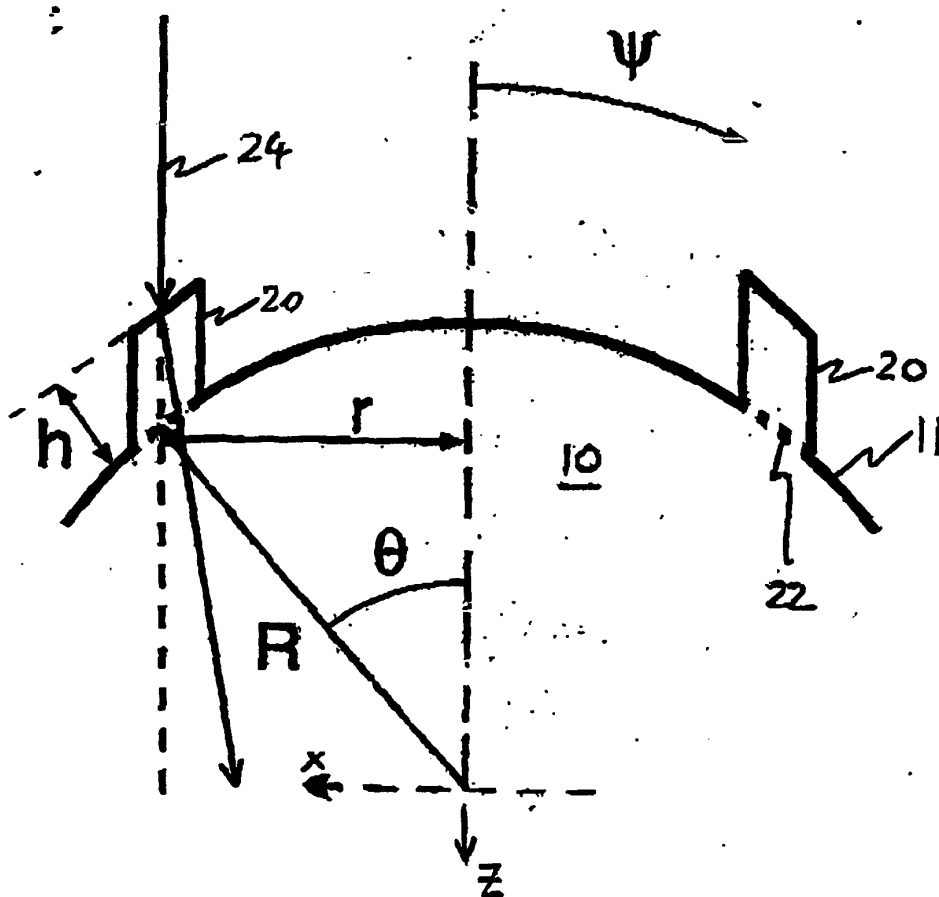


Fig. 2

FIG. 3

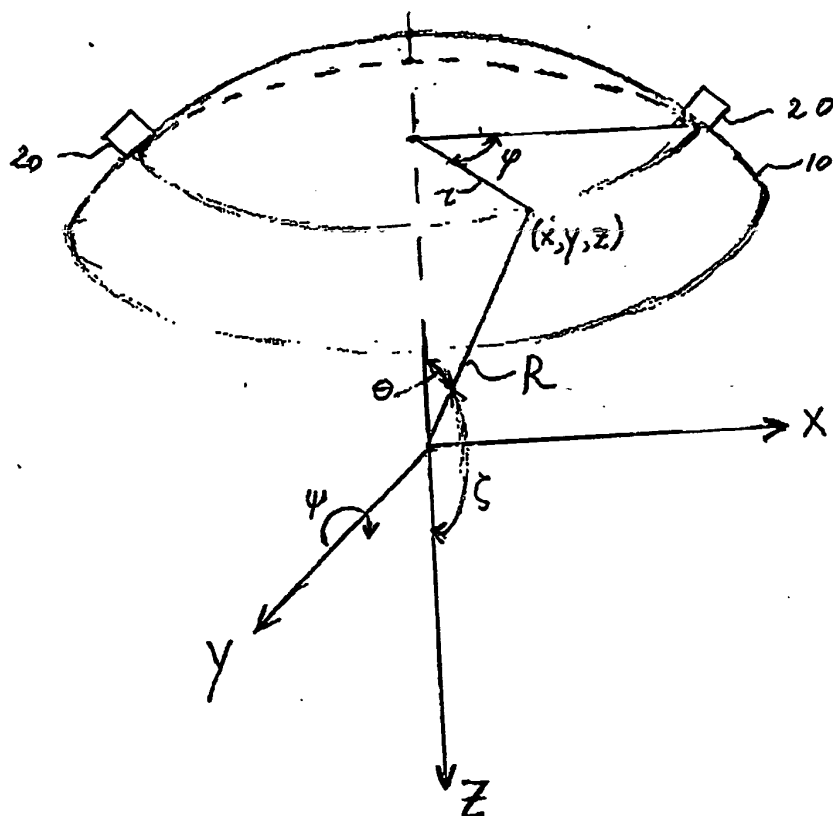


FIG. 4

03-10-2000

17:13

FRI

PS CIP NL

EP00203437.9

TO

1482743469

NO. 965

F SPEC

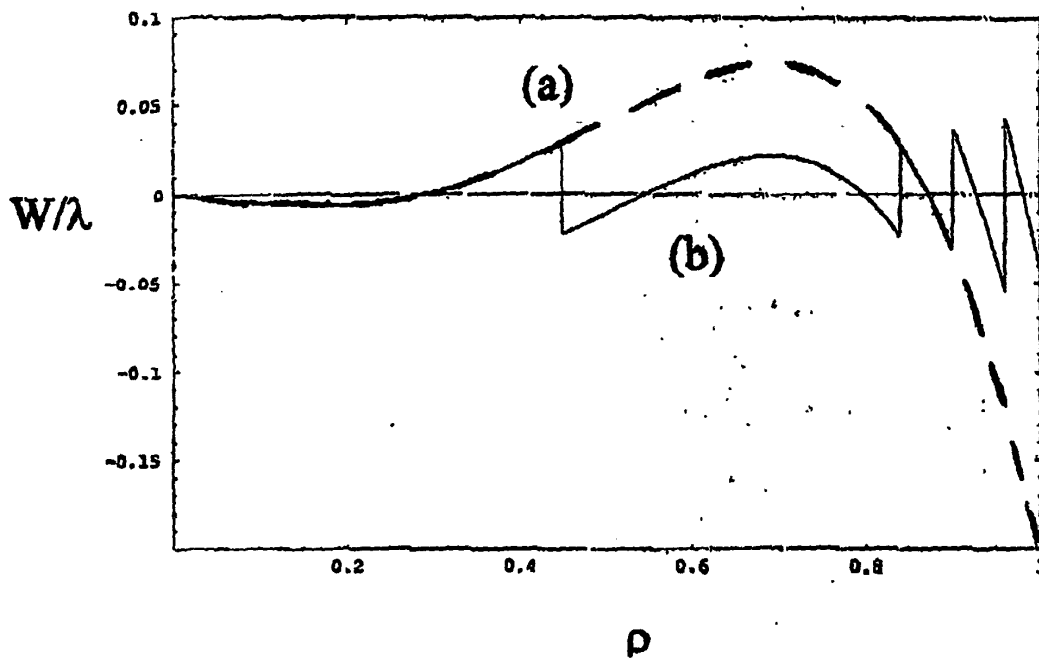


FIG. 5